

## STELCAR™ JET KOTE™ 135

TECHNICAL DATA

| HVOF & PLASMA SPRAY DEPOSITION |

### PREMIUM QUALITY HVOF COATING



**JK™ 135** is a premium quality powder developed specifically for the deposition of high quality HVOF coatings. When deposited using the Jet Kote™ HVOF system, **JK™ 135** produces coatings with similar, or in many cases superior, performance to Praxair D-Gun® LC-1C and LC-1H, although **JK™ 135** contains less Cr<sub>3</sub>C<sub>2</sub> particles than is typical of these coating compositions. **JK™ 135** coatings can be diamond ground and lapped to smooth surface finishes of <0.05 μm (<2 μ-inch) R<sub>A</sub>.

### TYPICAL APPLICATIONS

**JK™ 135** HVOF coatings replace hard chrome and Praxair D-Gun® LC-1C and LC-1H coatings in many industries. **JK™ 135** is used for the hardfacing of nuclear plant power check and flow control valve seats and seals, and in the aerospace industry on engine stage seal areas, fuel nozzles, compressor and turbine blades for high temperature oxidation, fretting wear and erosion resistance. Other applications include gas turbine bearing journals, steam valve seats, compressor rods, feed screws, doctor blades, paper drying and calendaring rolls, mechanical seal faces and pump casings, impellers, plungers, and sleeves. The NiCr matrix provides excellent corrosion resistance in a wide range of environments. **JK™ 135** coatings perform well in chemical and petrochemical applications, for example ball valves, catalytic converter valve stems and guides, heat exchanger components, furnace blowers, fans, thermo-wells and gate valves.

### WEAR RESISTANCE OF JK™ 135 COATINGS

**JK™ 135** coatings are resistant to abrasion, solid particle erosion, cavitation and fretting wear up to about 980°C (1800°F). The volume loss of **JK™ 135** vs. hard chrome in the ASTM G65-91 abrasion test (130N force, 75 rpm) is shown below<sup>1</sup>. **JK™ 135** exhibits a significantly lower mass loss than hard chrome.

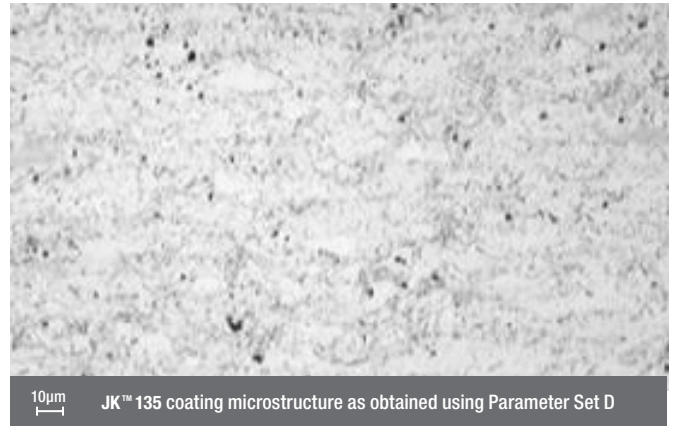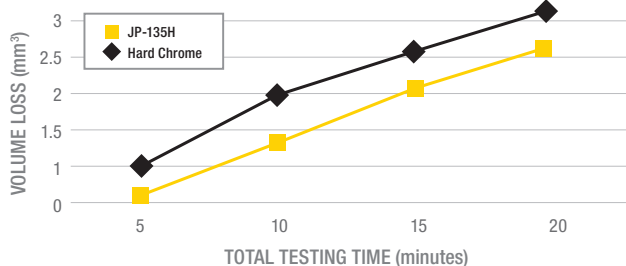

### CORROSION RESISTANCE OF JK™ 135 COATINGS

**JK™ 135** has excellent corrosion resistance in a wide range of environments, including high temperature oxidation resistance in gaseous environments, due to the NiCr matrix. The primary function of **JK™ 135** is wear protection. If the substrate is not corrosion resistant to the environment, **JK™ 135** can provide superior corrosion protection especially when sealed.

**Sour Gas Corrosion Test Results:** In an independent client test, **JK™ 135** coatings were subjected to two sour gas environments for 30 days, as follows:

- 500ppm Cl- brine, 30 psia H<sub>2</sub>S, 30 psia CO<sub>2</sub>, 740 psia N<sub>2</sub> at 175°F
- 500ppm Cl- brine, 330 psia H<sub>2</sub>S, 330 psia CO<sub>2</sub> at 350°F

**JK™ 135** provided excellent protection in the first environment (corrosion rate <0.21mpy), and reasonable protection in the second environment (corrosion rate <0.30mpy). In both tests **JK™ 135** performed either as well as or better than all three competitive coatings subjected to the same test.

### NOMINAL POWDER PROPERTIES

Mass Composition:	75%Cr <sub>3</sub> C <sub>2</sub> – 25%[Ni–20%Cr]
Nominal Size:	–53+10μm (–270 mesh+10μm )
Production Method:	Agglomerated, sintered and densified



1. As tested independently by TWI Ltd., Cambridge, U.K., <http://www.twi.co.uk>.  
All coatings produced with manufacturer's recommended spray parameters.

COATING PROPERTIES WHEN USING PROPYLENE FUEL

	Set A	Set B
<b>Microhardness</b>	610–720 DPH [300g]	700–910 DPH [300g]
<b>Macrohardness</b>	88.0–89.5 R15N	87.5–91.5 R15N
<b>Bond Strength</b>	Approx. 69 MPa (10 ksi)	>75.9 MPa (>11 ksi)
<b>Est. Porosity</b>	<1.5%	<1.0%
<b>Oxide Level (Visual Estimate)</b>	8–15%	10–20%
<b>Density (Approx.)</b>	5.8 g/cm <sup>3</sup>	6.2 g/cm <sup>3</sup>
<b>Max. Coating Thickness**</b>	0.6 mm (0.025")	1.3 mm (0.05")
<b>D.E. Approx.</b>	49%	49%
<b>Powder Feed</b>	30–40 g/min.	30–40 g/min.
<b>Coverage (Estimated)</b>	0.14 kg.m. <sup>-2</sup> 100µm <sup>-1</sup> (0.7 lb.ft. <sup>-2</sup> 0.1in <sup>-1</sup> )	
<b>Surface Finish (As-sprayed)</b>	5.1–7.5 µm (200–300 µ-in) AA	4.4–6.6 µm (175–258 µ-in) AA
<b>Surface Finish (Ground/Lapped)</b>	0.026–0.052 µm (1–2 µ-in) AA	
<b>Service Temp.</b>	Up to approx. 980°C (1800°F)	

\*\* Approximate, when sprayed onto flat shapes. Thicker coatings will often be possible on cylindrical parts.

COATING PROPERTIES WHEN USING HYDROGEN FUEL

	Set C	Set D
<b>Microhardness</b>	730–875 DPH [300g]	775–940 DPH [300g]
<b>Macrohardness</b>	87.5–90.3 R15N	88.5–91.5 R15N
<b>Bond Strength</b>	>69 MPa (10 ksi)	>75.9 MPa (>11 ksi)
<b>Est. Porosity</b>	<1.0%	<1.0%
<b>Oxide Level (Visual Estimate)</b>	5–10%	<5%
<b>Density (Approx.)</b>	5.8 g/cm <sup>3</sup>	6.2 g/cm <sup>3</sup>
<b>Max. Coating Thickness**</b>	1.3 mm (0.050")	1.9 mm (0.076")
<b>D.E. Approx.</b>	57%	53%
<b>Powder Feed</b>	30–45 g/min.	30–45 g/min.
<b>Coverage (Estimated)</b>	0.10–0.12 kg.m. <sup>-2</sup> 100µm <sup>-1</sup> (0.5–0.6 lb.ft. <sup>-2</sup> 0.1in <sup>-1</sup> )	
<b>Surface Finish (As-sprayed)</b>	2.5–5.1 µm (100–200 µ-in) AA	
<b>Surface Finish (Ground/Lapped)</b>	0.026–0.052 µm (1–2 µ-in) AA	
<b>Service Temp.</b>	Up to approx. 980°C (1800°F)	

CUSTOMER SPECIFICATIONS

**JK™ 135** powder can be certified to B50TF263 Class B. The coating is approved to F50TF77, Class A and B, when sprayed with Parameter Set C or D and the certified powder. The powder meets AMS 2447-3, is approved to Z518 and is similar to AMS 7875, PWA1305, MSRR 9507/17, DMR 33.006, EMS 52432 CL. II and MIL-P-83348-Comp C Type III.

SPRAYING OF JK™ 135 HVOF COATINGS

Although the use of the Jet Kote™ HVOF system is recommended, **JK™ 135** powder can be deposited using other HVOF systems.

SIMILAR POWDER PRODUCTS

- Kennametal Stellite GmbH JK™ 7184
- AMDRY™ 5260
- Amperit™ 584, Amperit™ 585
- TAFE Praxair 1376T

Kennametal Stellite™ manufactures sophisticated alloys in the form of castings, powders, coatings, consumables, and machined parts that resist wear, corrosion, and abrasion. Information provided in this document is intended only for general guidance about Kennametal Stellite™ products and is the best information in our possession at the time. Product users may request information about their individual use of our products, but Kennametal Stellite™ does not warrant or guarantee this information in any way. Selection and purchase of Kennametal Stellite™ products is the sole responsibility of the product user based on the suitability of each use. Individual applications must be fully evaluated by the user, including compliance with applicable laws, regulations, and non-infringement. Kennametal Stellite™ cannot know or anticipate the many variables that affect individual product use and individual performance results may vary. For these reasons, Kennametal Stellite™ does not warrant or guarantee advice or information in this document, assumes no liability regarding the same, and expressly disclaims any warranty of any kind, including any warranty of fitness for a particular purpose, regarding the same.

FINISHING OF JK™ 135 HVOF COATINGS

**JK™ 135** coatings are typically finished to 6–14 µ-inches (0.15–0.36 µm) by wet grinding with diamond media. They can also be super finished by lapping to <2 µ-inches (0.05 µm).

HEAT TREATMENT OF JK™ 135 HVOF COATINGS

Heat treating the coating obtained by Parameter Sets C and D at 538°C (1000°F) for 72 hours can increase the hardness to approximately 1100 DPH[300g]. This may increase low angle erosion resistance, especially at elevated temperatures.

SPRAY AND GRINDING PARAMETERS FOR JK™ 135 ARE AVAILABLE ON REQUEST.

JP-5000 is a trademark of Praxair-TAFE Inc. D-Gun is a trademark of Praxair Inc. Amperit is a trademark of H.C. Starck. Diamond Jet, Diamalloy and DJ-2600 are trademarks of SULZER METCO Inc.

EUROPEAN SALES OFFICES

<b>Kennametal Stellite</b> Unit 3, Birch Kembrey Business Park Swindon SN2 8UU UK Phone: 44.1793.498500 Fax: 44.1793.498501	<b>Kennametal Stellite</b> Zur Bergpflege 51 – 53 56070 Koblenz Germany Phone: 49.261.80.88.0 Fax: 49.261.80.88.35	<b>Kennametal Stellite</b> Via G. Di Vittorio, 24 20090 Pieve Emanuele Milan Italy Phone: 39.02.907871 Fax: 39.02.90787 231
-----------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------

E-mail: europesales.stellite@kennametal.com

AMERICAS SALES OFFICE

**Kennametal Stellite**  
1201 Eisenhower Drive N  
Goshen, Indiana 46526  
USA  
Phone: 1.574.534.2585  
Fax: 1.574.534.3417

E-mail: americasales.stellite@kennametal.com



www.kennametal.com/stellite